

FIG. 1 is a perspective view of a container assembly 10 in an open position. The container assembly 10 includes a base 20 and a lid 2. The base 20 includes a front wall 24, a side wall 26, and a bottom wall 27. The lid 2 includes a top wall 28 and a front wall 30. The lid 2 is hinged to the base 20 at the front wall 24. The lid 2 is shown in an open position, pivoted about the hinge. The lid 2 includes a plurality of latches 12, 70, 80, 110. The latches 12, 70, 80, 110 are mounted to the front wall 30 of the lid 2. The latches 12, 70, 80, 110 are configured to engage the front wall 24 of the base 20. The latches 12, 70, 80, 110 are shown in an engaged position, locking the lid 2 to the base 20. The latches 12, 70, 80, 110 are shown in a perspective view, with the latches 12, 70, 80, 110 being cylindrical in shape. The latches 12, 70, 80, 110 are shown in a perspective view, with the latches 12, 70, 80, 110 being cylindrical in shape. The latches 12, 70, 80, 110 are shown in a perspective view, with the latches 12, 70, 80, 110 being cylindrical in shape.

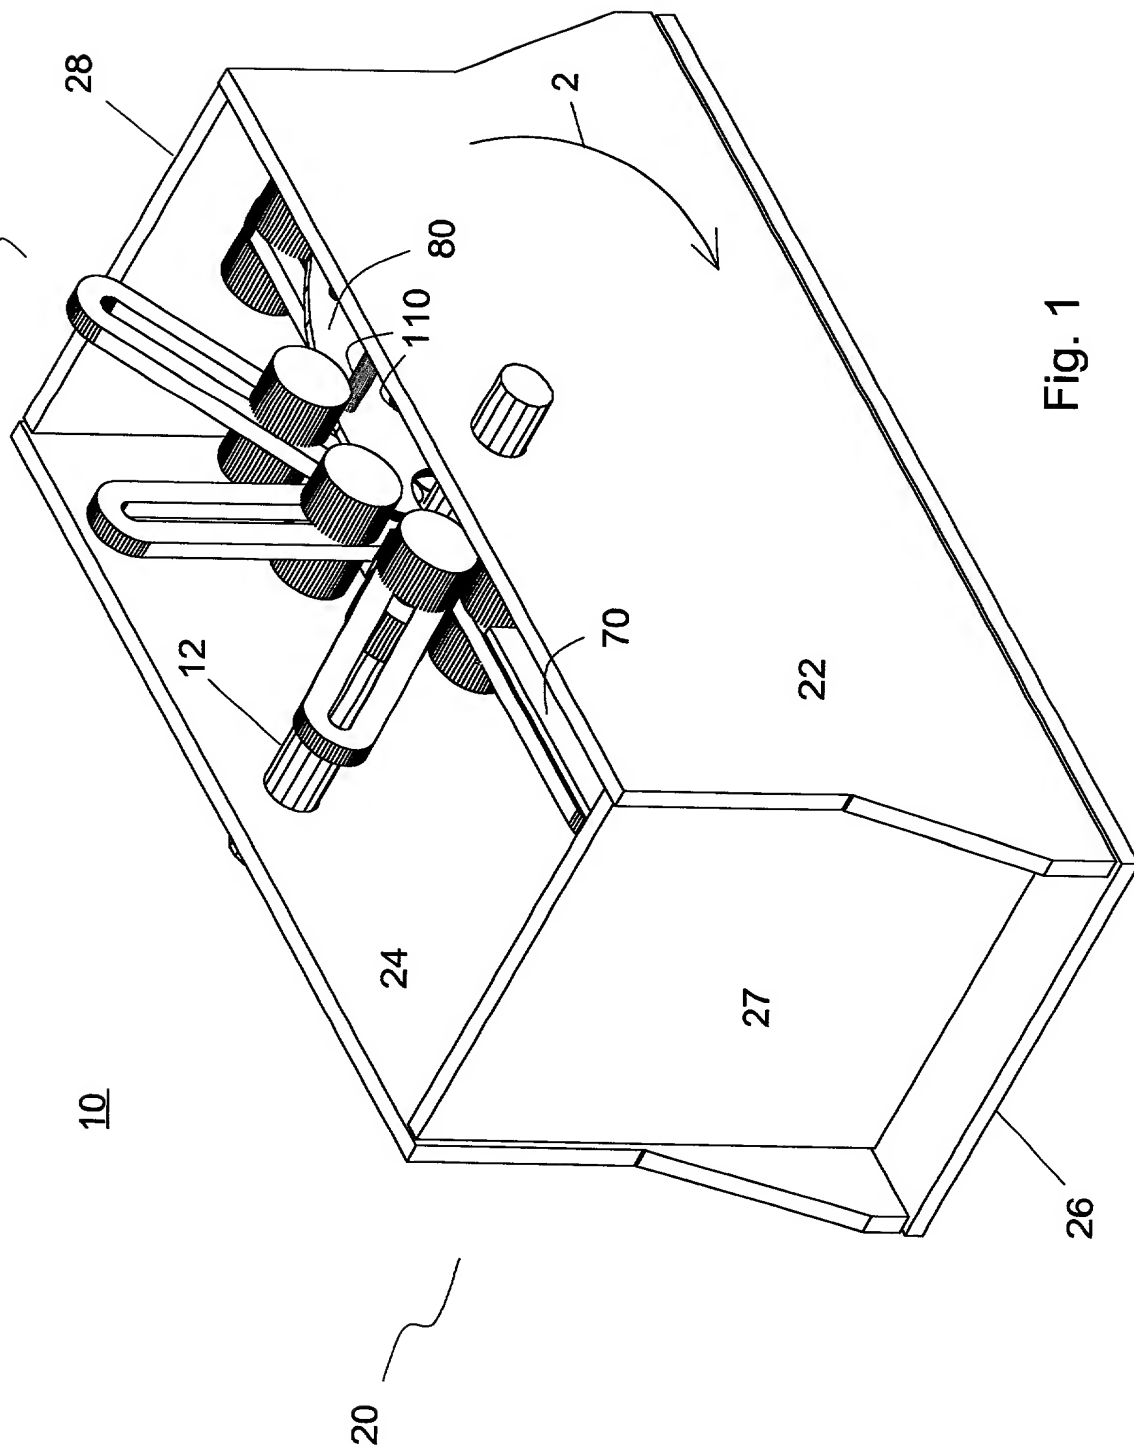


Fig. 1





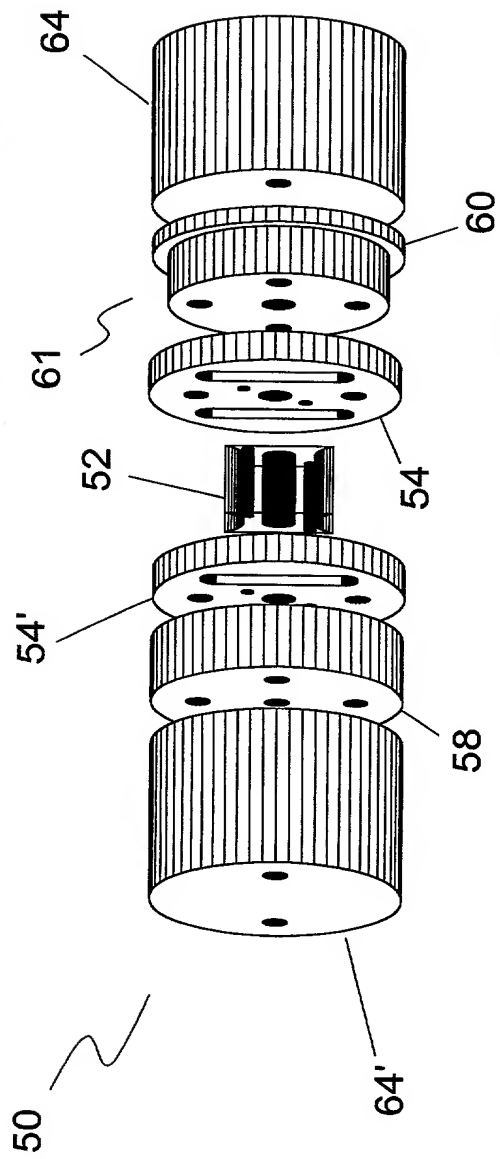


Fig. 5A

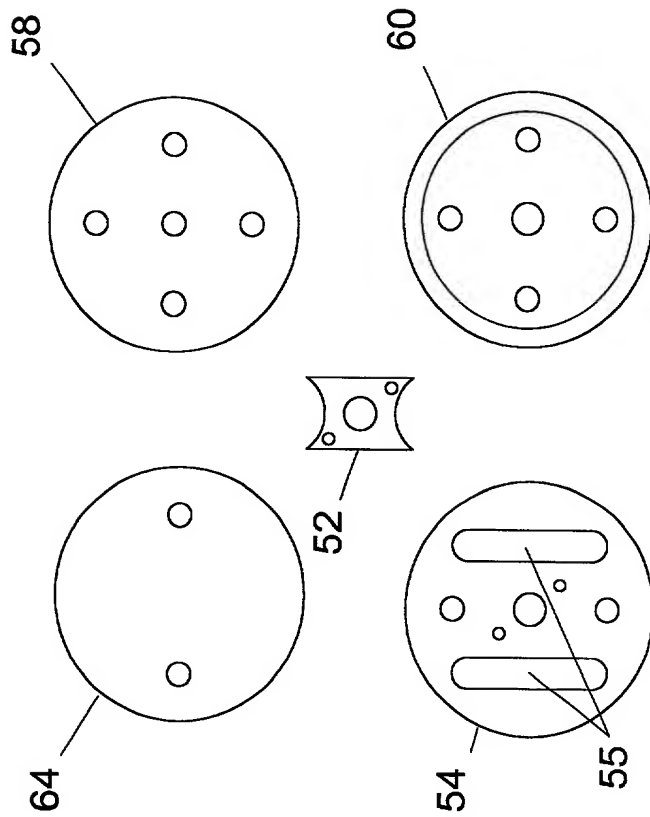


Fig. 5B

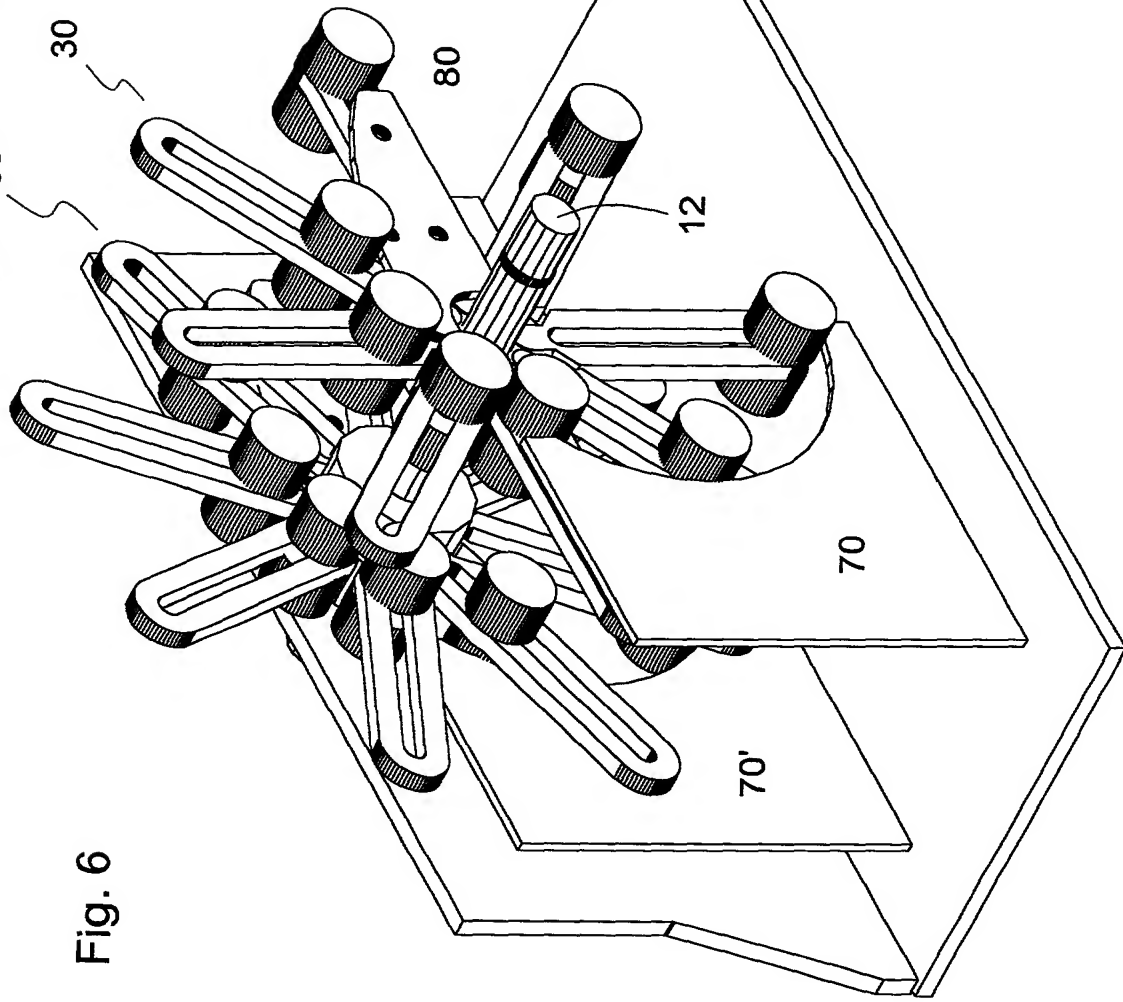


Fig. 6

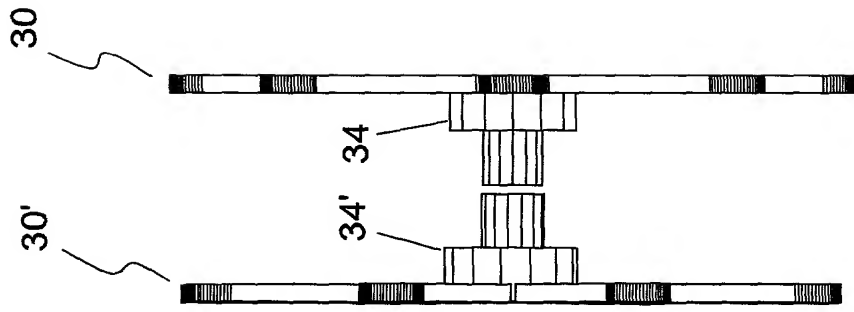


Fig. 7

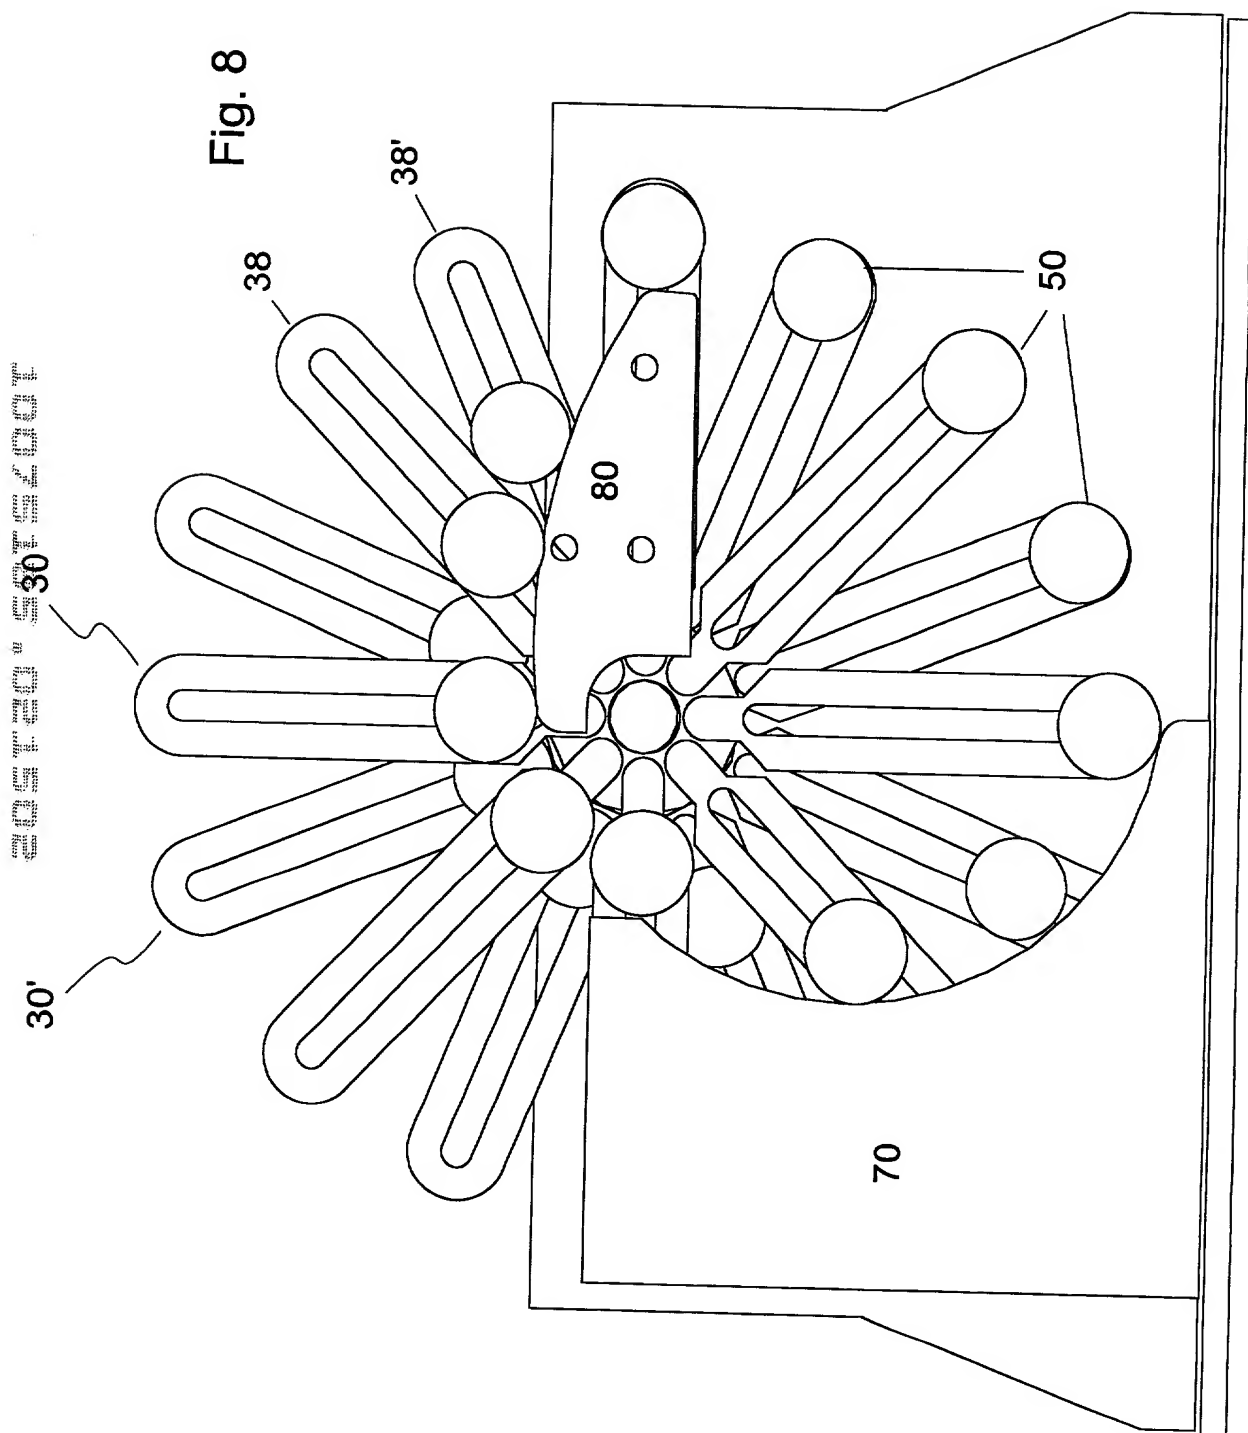


Fig. 8

